




SmokeCloak EASY

SPECIFICATION SHEET

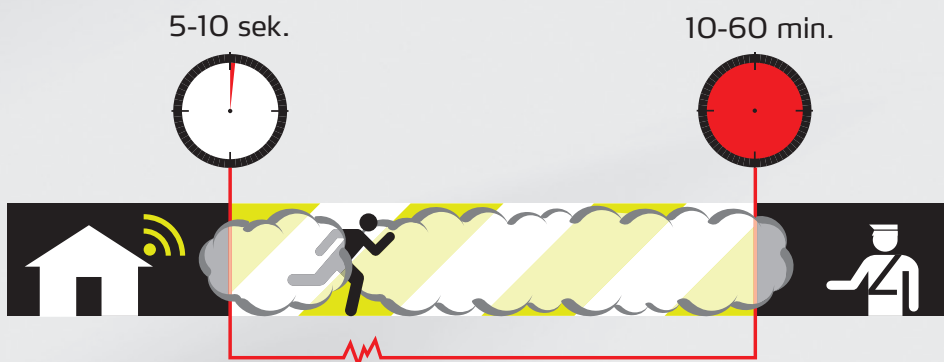

SmokeCloak®



| | EASY 600 | EASY 1100 |
|---|--|---|
| Output | 30 sec.: 420 m ³ (210*) 60 sec.: 630 m ³ (315*) | 30 sec.: 804 m ³ (402*) 60 sec.: 1284 m ³ (642*) |
| Tested and approved in accordance with EN 50131-8: | Yes | Yes |
| Number of output nozzles | 1 | 2 |
| Heat up time (ready) | 9 min. | 9 min. |
| Fluid | 1,0 litre fluid refill system | 1,0 litre fluid refill system |
| Installation weight | 10,6 kg | 13,4 kg |
| Dimensions | 252 mm wide x 193 mm deep x 418 mm high | 327mm wide x 193mm deep x 418mm high |
| Reaction time | 0,1 seconds | 0,1 seconds |
| Pulse Function | Programmable via Dip switch | Programmable via Dip switch |
| Electricity | 200 - 250V & 110V | 200 - 250 V |
| Power consumption | 1500watt @ 230 Volt / 1050 watt @ 110 V | 2100 watt @ 230 V |
| Average power consumption | 75W | 140W |
| Colour | white RAL 9016 | white RAL 9016 |

*M3 according to current EU standard EN 50131-8



SmokeCloak DNA



Non Toxic on human, animals, food and It.



NF



EN 50131-8 European standard



CE Certified



Product features

- Very high output of dense white fog for maximum protection
- Harmless dry vapour with no negative side effects
- The fog hangs up to an hour
- Fluid refill system
- Danish design
- Battery back-up
- Heavy duty sabotage resistant case
- Internal system status LED indicators
- Built-in self diagnostics
- Electronic fluid measurement system
- Output signals for communication with existent alarm system
- Input signals for controlling the SmokeCloak from existing alarm system

Installation

- Installation, service and maintenance friendly
- Horizontal, vertical and ceiling mounting option
- Seamless integration with all existing alarm systems

